

# In-wall mounting set St



## Attention

Ideally, the in-wall mounting set St is mounted at 143 cm (upper edge of the installation housing).

## Delivery scope

- In-wall mounting set St (consisting of an installation housing, a stainless steel mounting plate and a stainless steel panel), including nuts and one 4x15 mm star screw
- 4 x flat screws 4x35 mm plus anchors

## Installation

1. First of all, please cut out the jig along its borders on page 2. Position the jig at a height of approx. 143 cm (upper edge) on the wall and draw its silhouette by using a pencil. Then an 8 centimetres deep open space has to be cut out along the selection. Next, place the installation housing in the open space and mark the spots for drilling the anchor fittings and cables. After drilling those wholes, mount the installation housing to the wall by using the accompanying fittings and screws. Alternatively, it is of course also possible to fix the installation housing by using fitting foam glue.



Fig. 1

2. Please take the stainless steel mounting plate and fix the plastic mounting plate of the scanner unit. (The plastic mounting plate as well as all necessary screws came along with the scanner unit of ekey TOCAhome). The scanner unit has to be fixed by using a star screw (which also came along with the scanner unit) to the plastic mounting plate.

(Figure 2 and 3)



Fig. 2



Fig. 3

3. Take the stainless steel panel and fix the mounting plate to its back by using the accompanying screw nuts. Do not tighten those screws too strong! Stick the front panel to the already mounted back panel.

Finally fix the front panel by using the accompanying star screw to the mounted back panel.

(Figure 4, 5 and 6)



Fig. 4



Fig. 5



Fig. 6

**Dimensions of the installation housing:**

Width **5**  $\frac{11}{16}$  in (14.5 cm)  
Height **7**  $\frac{2}{16}$  in (18.1 cm)  
Depth **3**  $\frac{1}{16}$  in ( 7.7 cm)



Part # 100307


# In-wall mounting set St

**Dimensions of the stainless steel panel:**

Width **6**  $\frac{11}{16}$  in (17.0 cm)  
Height **8**  $\frac{1}{16}$  in (20.4 cm)  
Depth **0**  $\frac{6}{16}$  in ( 0.1 cm)

$3 \frac{1}{16}$  in (7.7cm)

Upper edge  
Installation housing  
**56**  $\frac{5}{16}$  in (143 cm)

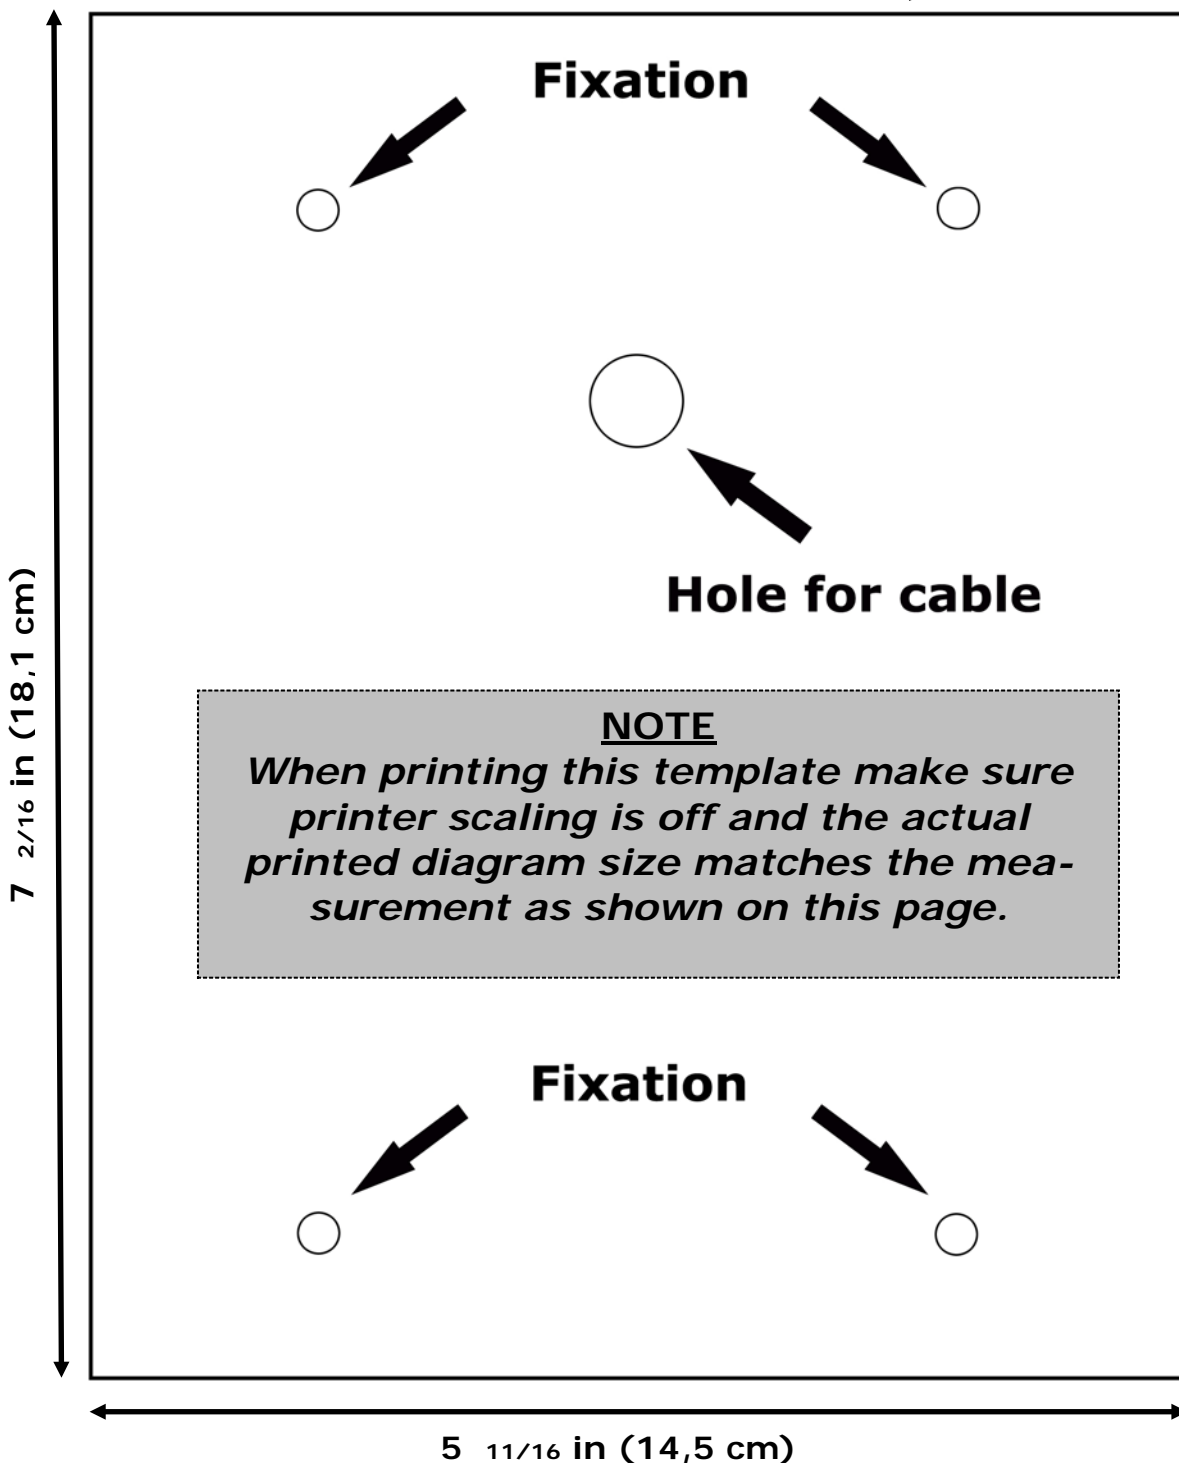

7  $\frac{2}{16}$  in (18,1 cm)

**Fixation**

**Hole for cable**

**NOTE**

*When printing this template make sure printer scaling is off and the actual printed diagram size matches the measurement as shown on this page.*

**Fixation**

5  $\frac{11}{16}$  in (14,5 cm)